


# AGUILAR OBP2

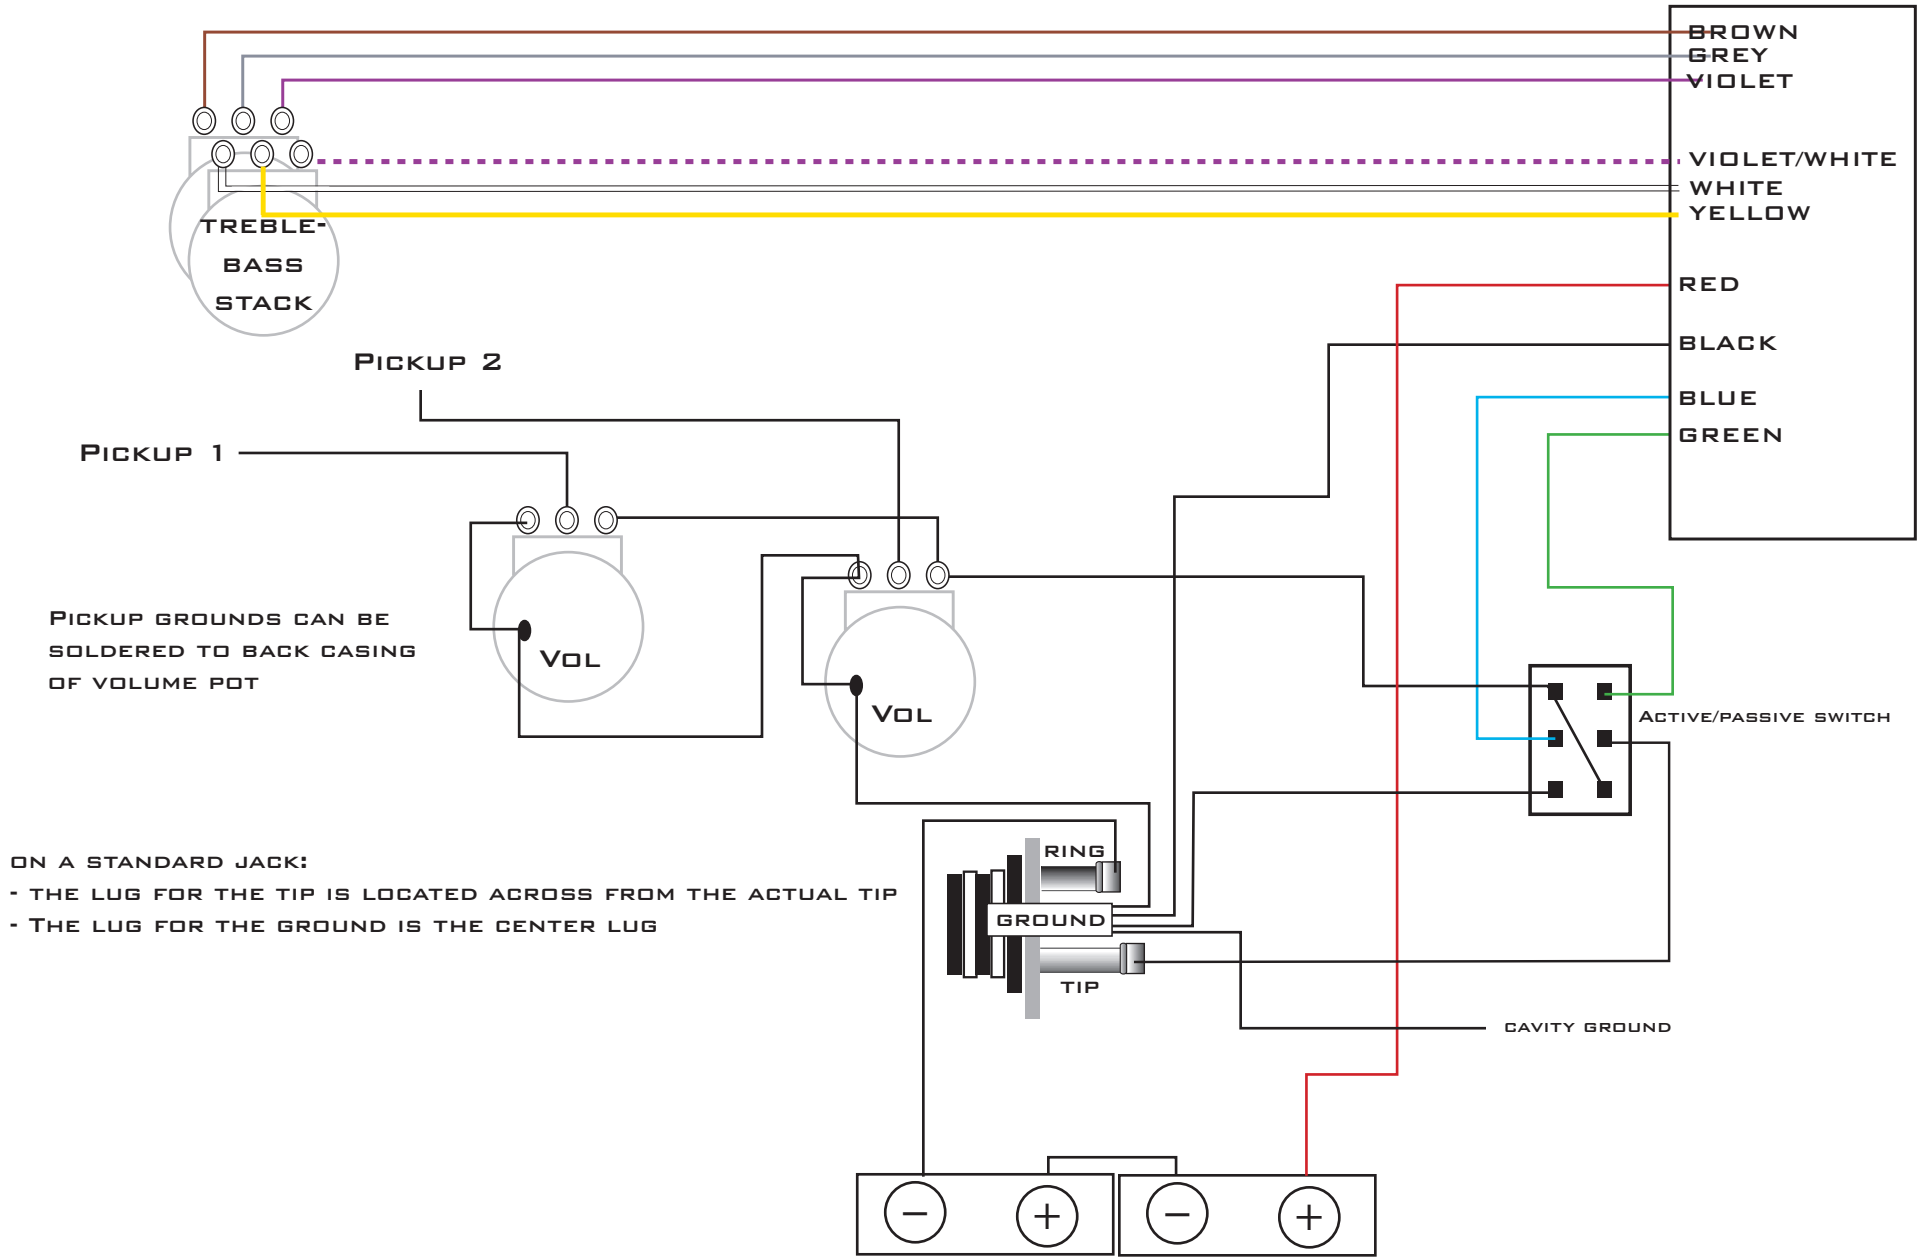

PICKUP GROUNDS CAN BE  
SOLDERED TO BACK CASING  
OF VOLUME POT

ON A STANDARD JACK:  
- THE LUG FOR THE TIP IS LOCATED ACROSS FROM THE ACTUAL TIP  
- THE LUG FOR THE GROUND IS THE CENTER LUG

9 OR 18 VOLTS CAN BE USED WITH THE OBP2/OBP3 PREAMPS. FOR 9 VOLT USE,  
CONNECT THE NEGATIVE FROM THE BATTERY TERMINAL TO THE RING ON THE JACK.